

TECHNICAL DATA SHEET

SURFACE MOUNTED GRAB BAR/TOWEL RAIL




GRAB BAR/TOWEL RAIL 832-012

- Available in 600mm and 750mm widths (centre to centre)
 - Ideal for patient care applications
 - 32mm diameter grab bar
 - 25mm diameter towel rail
 - Concealed fixing
- Overall Dimensions
Projects 185mm

MODEL 832-012

- Options:
- 2 Peened (Safety Grip)
 - 4 Mirror Polished
 - 6 Powdercoat

Available Widths:
600mm and 750mm

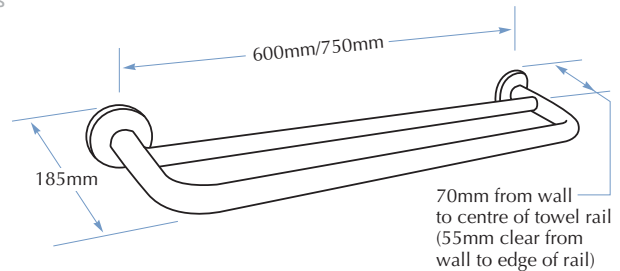

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 80mm dia. 13 gauge stainless steel.

ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel. One-piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.

TUBING: Fabricated of type 304 (18-8), 32mm (1-1/4") O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab bar. All welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter.

Polished (No. 4) satin finish will not scratch hands or catch dirt

Mandrel bending process maintains uniform bar diameter

Bar heliarc welded to flange to form a single structural unit for maximum strength

Mounting holes

18 gauge type 304 stainless steel

Flange escutcheon

Escutcheon snaps over flange to conceal mounting screws

Flange of 13 gauge type 304 stainless steel

STRENGTH:


When properly mounted, all Bradley heavy duty grab bar systems meet or exceed the requirements of Australian Standard AS1428.1(2,3), of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS).

INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use bar as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Snap escutcheons into place.

GUIDE SPECIFICATION:

Grab bar shall be fabricated of type 304 satin finish stainless steel with concealed mounting flanges in sizes and configurations as indicated.

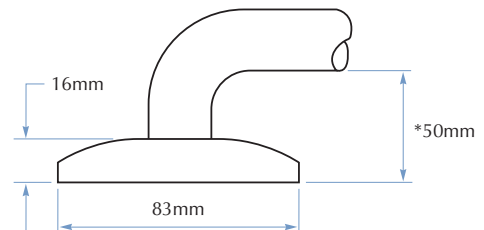

CONCEALED

*50mm wall clearance required under most building design codes

TOLL FREE 1300 364 561

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation.

Bradley
AUSTRALIA.COM